



WATTAGES & LAMP TYPES	35W	42W	50W	70W	80W	100W
HPS			✓	✓		✓
HQI			✓	✓		✓
CDM	✓			✓		✓
MBF			✓		✓	
CFL		✓				



Sugg Lighting Limited

Sussex Manor Business Park

Gatwick Road

Crawley

West Sussex

RH10 9GD

England

Telephone: +44 (0)1293 540 111

Fax: +44 (0)1293 540 114

E-mail: sales@sugglighting.co.uk

www.sugglighting.co.uk



2005

## Product Features

The Gallery is a traditional cast aluminium lantern widely used in the late 1800's. It has clear lower and frosted upper glazing which provides a degree of upward light to softly illuminate building fascias. The lantern is cast aluminium and with its decorative cast finial set makes it unique to Sugg Lighting.

### Features

The lantern is frog mounted as standard and designed to fit a 76mm spigot.

### Control Gear

All gear is class I wired and a range of discharge gear can be accommodated integrally within the lantern. The luminaire traditionally takes the glass refractor but it can also accommodate the small twin beam optic which offers a superior lighting performance. Single and two part electronic photocells are available as standard and should be factory fitted to maintain IP integrity.

## Options


### Mounting Options

Stirrup mounted post top bracket, galvanised steel, powder coated, black polyester for 76mm spigots.

## Typical Specification

The Gallery IP54 lantern: Cast aluminium frame, **polyester powder coated black RAL 9005** with **clear polycarbonate** lower glazing. Upper glazing frosted polycarbonate to upwardly illuminate the building front. Supplied with the Sugg **twin beam optic** for a **70w HPS T** lamp. The **E27** lampholder is positioned for a tubular lamp in a horizontal position. The upper glazing is illuminated by a 32w CFL lamp housed in the top. Lamps not supplied. The lantern comes complete with an **electronic photocell** fitted. The Gallery lantern measures 975mm in height and 475mm in diameter. Supplied powder coated **Black RAL 9005**, galvanised spigot bracket with provision for the lantern wiring, mounting tube to fit a **76mm** spigot.

Please note that items highlighted in bold can be changed using the options available.

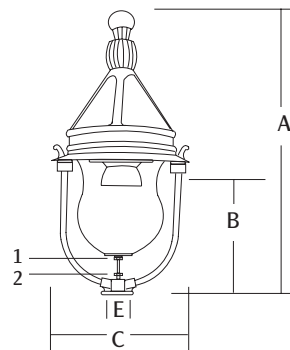

GLAZING OPTIONS	
Frosted Acrylic	✓
Polycarbonate	✓

OPTICS	
Small Twin Beam	✓
Refractor	✓
E27 Lamp Holder only	✓

### Relamping Instructions

To re-lamp: isolate from the electrical supply, loosen nut 1 then release nut 2 and lower glazing until the glazing can be removed from the frame. Then access for cleaning and replacing the lower lamp can be achieved. If the upper lamp needs replacing release the thumb screws and lower the optic tray then replace the upper lamp; reverse these instructions to reassemble.

DIMENSIONS	GALLERY	BOXED
<b>A Lantern Height</b>	975mm	1000mm
<b>B Lamp Height</b>	372mm	500mm
<b>C Diameter/Width</b>	475mm	500mm
<b>E Standard Entry</b>	76mm	
<b>Windage Area</b>	m <sup>2</sup>	
<b>Weight</b>	kg	kg

© Sugg Lighting reserve the right to change the construction of their products without prior consultation. This ensures that product developments and continued improvements are maintained.